



电动机外形及安装尺寸

【机座带底脚、端盖上无凸缘的电动机】

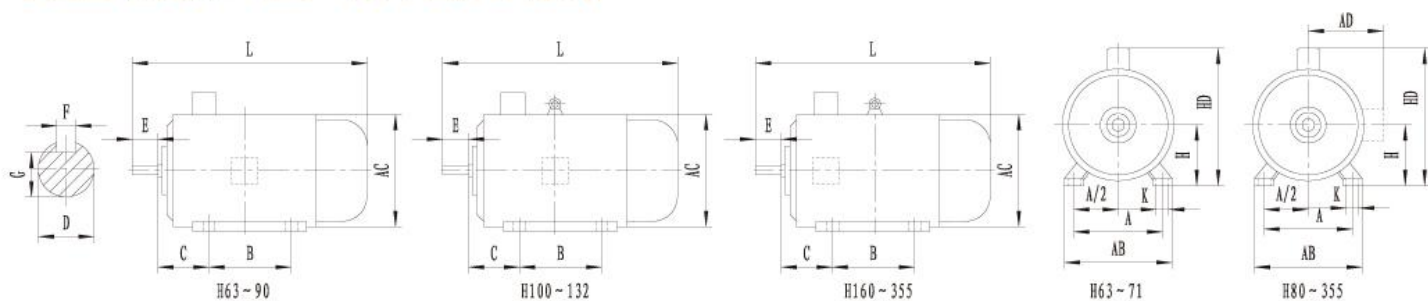

机座号 Frame size	极数 Poles	安装尺寸 Mounting dimensions										外形尺寸 Outline dimensions							
		A	A/2	B	C	D	E	F	G	H	K	AB	AC	AD	HD	L			
		YE2/YE3 YD/YDT	YVF2	YEJ2															
63M	2, 4	100	50	80	40	11	23	4	8.5	63	7	135	130	70	180	230	/	/	
71M	2, 4, 6	112	56	90	45	14	30	5	11	71		150	145	80	195	255	310	300	
80M	2, 4, 6, 8	125	62.5	100	50	19	40	6	15.5	80	10	165	175	145	220	305	350	360	
90S		140	70	100	56	24	50	8	20	90		180	195	155	250	360	380	390	
90L		125	70	125	56	24	50		20	90	390	410	415						
100L		160		80				140	63	28	60	24	100	435	455	465			
112M		190	95	140	70	80	10	33	132	12	230	240	190	300	470	465	480		
132S		216	108	140	89						38	80	10	33	132	270	275	210	345
132M		178	108	178	89	38	80	10	33	132	14.5	270	275	210	345	560	560	595	
160M		254		127								210	108	42	110	12	37	160	320
160L		254	127	254	108	42	110	12	37	160	14.5	320	330	255		420	740	720	765
180M		279		139.5				241	121	48	110	14	42.5	180	18.5	355	380	280	455
180L	279	139.5	279	121	48	110	14	42.5	180	18.5		355	380	280	455	790	775	865	
200L	318		159				305	133	55	110	16	49	200	18.5	395	420	305	505	830
225S	4, 8	356	178	286	149	55	110	16	49		225	18.5	435	470	335	560	830	900	965
225M	2			311				60	18	53	250	435					470	335	560
250M	4, 6, 8	203	349	168	65	140	18	53		250		24	490	510	370	615	915	995	
	2							65	58		915								995
280S	2	457	228.5	368	190	75	140	20	67.5	280	24	550	580	410	680	985	1050		
280M	4, 6, 8							419	65							18	58	1035	1100
	315S	2	254	406	216	68	170	22	71	315	28	635	645	490	800	1180	1235		
4, 6, 8, 10		80														71	1290	1265	
315M	2	254	457	216	65	140	18	58	315	28	635	645	490	800	1210	1345			
	4, 6, 8, 10														80	71	1320	1375	
315L	2	305	508	254	65	140	18	58	355	28	730	710	555	910	1210	1345			
	4, 6, 8, 10														80	71	1320	1375	
355M	2	305	560	254	75	140	20	67.5	355	28	730	710	555	910	1500	1570			
	4, 6, 8, 10														95	86	1530	1600	
355L	2	305	630	254	75	140	20	67.5	355	28	730	710	555	910	1500	1570			
	4, 6, 8, 10														95	86	1530	1600	
400M、L	4, 6, 8, 10	686	343	630 710	280	110	210	28	100	400	35	808	800	695	1095	1920	2160		

【机座带底脚、端盖上有凸缘（带通孔）的电动机】

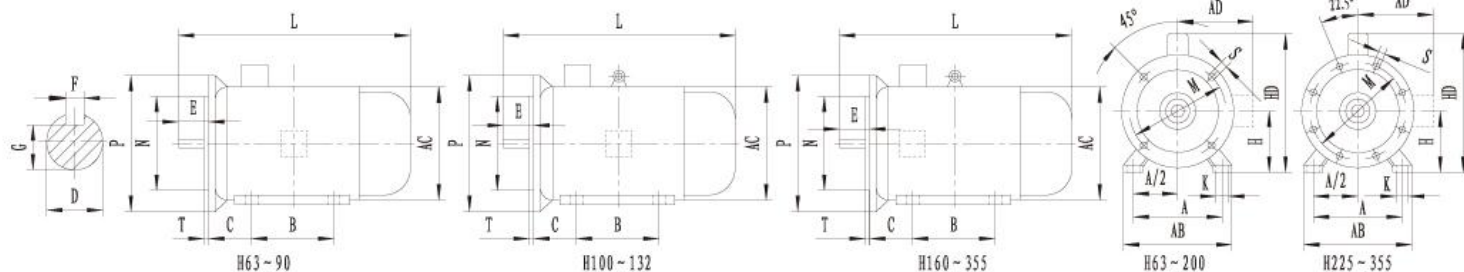

机座号 Frame size	凸缘号 Flange size	极数 Poles	安装尺寸 Mounting dimensions																外形尺寸 Outline dimensions										
			A	A/2	B	C	D	E	F	G	H	K	M	N	P	R	S	T	凸缘孔数 Flange holes	AB	AC	AD	HD	L					
			YE2/YE3 YD/YDT	YVF2	YEJ2																								
63M	FF115	2, 4	100	50	80	40	11	23	4	8.5	63	7	115	95	140				10	3		135	130	70	180	230	/	/	
71M	FF130	2, 4, 6	112	56	90	45	14	30	5	11	71		130	110	160							150	145	80	195	255	310	300	
80M			125	62.5	100	50	19	40	6	15.5	80											165	175	145	220	305	350	360	
90S	FF165		140	70	100	56	24	50		20	90	10	165	130	200				12	3.5		180	195	155	250	360	380	390	
90L					125																					390	410	415	
100L	FF215		160	80	140	63	28	60		24	100		215	180	250							205	215	180	270	435	455	465	
112M			190	95	140	70					112	12										230	240	190	300	470	465	480	
132S	FF215	2, 4, 6, 8	216	108	140	89	38	80	10	33	132		265	230	300				14.5	4	4					510	520	555	
132M					178																	270	275	210	345	560	560	595	
160M			254	127	210	108	42		12	37	160											320	330	255	420	670	670	720	
160L	FF300				254							14.5	300	250	350											700	720	765	
180M					241		110																			740	735	825	
180L			279	139.5	279	121	48		14	42.5	180											355	380	280	455	790	775	865	
200L	FF350		318	159	305	133	55		16	49	200		350	300	400							395	420	305	505	790	830	915	
225S		4, 8			286		60	140	18	53		18.5														830	900	965	
225M	FF400	2	356	178	311	149	55	110	16	49	225		400	350	450							435	470	335	560	825	895	960	
		4, 6, 8					60												0	18.5	5					855	925	990	
250M		2	406	203	349	168			18		250											490	510	370	615	915	995		
		4, 6, 8					65																						
280S	FF500	2			368		75	140	20	67.5		24	500	450	550											985	1050		
		4, 6, 8	457	228.5		190																550	580	410	680				
280M		2					65		18	58																1035	1100		
		4, 6, 8			419		75		20	67.5																			
315S		2			406		65		18	58																1180	1235		
		4, 6, 8, 10					80	170	22	71																1290	1265		
315M	FF600	2	508	254	457	216	65	140	18	58	315		600	550	660							635	645	490	800	1210	1345		
		4, 6, 8, 10					80	170	22	71																1320	1375		
315L		2			508		65	140	18	58		28														1210	1345		
		4, 6, 8, 10					80	170	22	71												24	6			1320	1375		
355M		2			560		75	140	20	67.5																1500	1570		
		4, 6, 8, 10					95	170	25	86																1530	1600		
355L	FF740	2	610	305		254	75	140	20	67.5	355		740	680	800							730	710	555	910	1500	1570		
		4, 6, 8, 10			630		95	170	25	86																1530	1600		

